

# Pump Drives


Our modular design can be configured and shipped to meet your application needs. It's built tough to provide outstanding performance and is backed by our responsive engineering and customer service teams to give you the leading pump drive solution.

## FEATURES

- Quick Ship Program Available
- Modified Standards Available
- Patented Modular Design
- Compact Package Size
- Cast Iron Housing
- AGMA Class 10 Spur Gearing
- One Piece Gear and Shaft Design
- Wide Range of Ratios
- Patented Wet Spline Connection; Patent No. 7,152,711
- Drop-in Replacement for Most Applications



## NOMENCLATURE FOR PUMP DRIVES

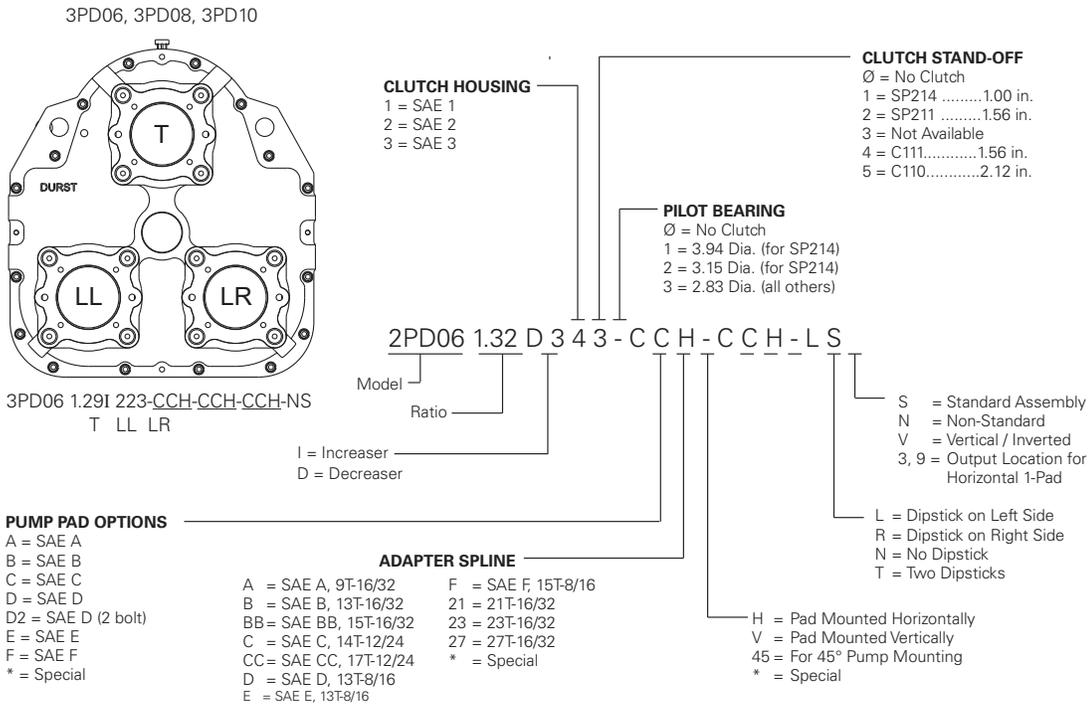

# Pump Drives



Model	Max KW	Max HP	Max Input Torque (N-m)	Max Input Torque (ft-lb)	Input Style	Flywheel HSG. Style	Ratio Inc. or Dec.	Pump Adapters	Pump Center Distance (mm)	Pump Center Distance (in)
<b>Single Pump Drive (Geared)</b>										
1PD06	369	495	1414	1040	P,C,S	0,1,2,3,4	1:1, 1.06, 1.18, 1.25, 1.32, 1.40, 1.48, 1.57, 1.67, 1.88 INC	A,B,C,D,E,F	152.4	6.0
1PD09	608	815	2325	1710	P,C,S	0,1,2,3,4	1:1, 1.12, 1.20, 1.30, 1.40, 1.70, 2.00	A,B,C,D,E,F	228.6	9.0
<b>Two Pump Drive</b>										
2PD05	276	370	949	700	P,C,S	2,3,4	1:1, 1.14, 1.40, 1.61, 2.00	A,B,C,D	254.0	10.0
2PD06	369	495	1414	1040	P,C,S	0,1,2,3,4	1:1, 1.06, 1.18, 1.25, 1.32, 1.40, 1.48, 1.57, 1.67, 1.88	A,B,C,D,E,F	304.8	12.0
2PD08	541	725	2074	1525	P,C,S	0,1,2,3,4	1:1, 1.13, 1.23, 1.34, 1.40, 1.53 INC	A,B,C,D,E,F	406.4	16.0
2PD10	708	950	2713	1995	P,C,S	0,1,2,3,4	1:1, 1.14, 1.17, 1.21, 1.29, 1.33, 1.38	A,B,C,D,E,F	533.4	21.0
<b>Three Pump Drive</b>										
3PD06	369	495	1414	1040	P,C,S	0,1,2,3,4	1:1, 1.17, 1.29, 1.36, 1.52, 1.69 INC	A,B,C,D	215.6 x 314.4	8.49 x 12.38
3PD08	541	725	2074	1525	P,C,S	0,1,2,3,4	1:1, 1.13, 1.23, 1.34, 1.40, 1.53 INC	A,B,C,D,E,F	337.6 x 304.8	13.29 x 12.0
3PD10	708	950	2713	1995	P,C,S	0,1,2,3,4	1:1, 1.14, 1.17, 1.21, 1.29, 1.33, 1.38	A,B,C,D,E,F	404.1 x 457.2	15.9 x 18.0
<b>Four Pump Drive</b>										
4PD08	541	725	2074	1525	P,C,S	0,1,2,3,4	1:1, 1.13, 1.23, 1.34, 1.40, 1.53 INC	A,B,C,D,E,F	281.4 x 293.1	11.08 x 11.54
4PD09	608	815	2325	1710	P,C,S	0,1,2,3,4	1:1, 1.12, 1.20, 1.30, 1.40, 1.70 INC	A,B,C,D,E,F	309.4 x 336.6	12.18 x 13.25
4PD11	764	1025	2924	2150	P,C,S	0, 1,2,3,4	1:1, 1.16, 1.23, 1.31, 1.39, 1.57 INC	A,B,C,D,E,F	407.9 x 406.4	16.06 x 16.0
<b>Inline Three and Four Pump Drive</b>										
3PD10L	708	950	2713	1995	P,C,S	0,1,2,3,4	1:1, 1.14, 1.21, 1.29, 1.33, 1.38	A,B,C,D,E,F	533.4	21.0
4PD10L	708	950	2713	1995	S	N/A	1:1, 1.14, 1.21, 1.29, 1.33, 1.38	A,B,C,D,E,F	533.4	21.0
<b>Five Pump Drive</b>										
5PD11	764	1025	2924	2150	P,C,S	0,1,2,3,4	1:1, 1.16, 1.23, 1.31, 1.39, 1.57 INC	A,B,C,D,E,F	407.9 x 406.4	16.06 x 16.0
<b>Eight Pump Drive</b>										
8PD09	608	815	2325	1710	S	N/A	1:1, 1.12, 1.20, 1.30, 1.40, 1.70 INC	A,B,C,D,E,F	309.4 x 336.6	12.18 x 13.25
8PD11	764	1025	2924	2150	S	N/A	1:1, 1.16, 1.23, 1.31, 1.39, 1.57 INC	A,B,C,D,E,F	407.9 x 406.4	16.06 x 16.0



## Regal Rexnord

Customer Service: 800-626-2120

Technical Service: 800-626-2093

CustomerService.PTSolutions@regalrexnord.com

[regalrexnord.com](http://regalrexnord.com)

The proper selection and application of products and components, including assuring that the product is safe for its intended use, are the responsibility of the customer. To view our Application Considerations, please visit <https://www.regalrexnord.com/Application-Considerations>. To view our Standard Terms and Conditions of Sale, please visit <https://www.regalrexnord.com/Terms-and-Conditions-of-Sale>

"Regal Rexnord" is not indicative of legal entity. Refer to product purchase documentation for the applicable legal entity.

Regal Rexnord and Durst are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

© 2019, 2026 Regal Rexnord Corporation, All Rights Reserved. MCF-10285-DU-EN-US 02/26

